


# BS5 Series

## Photo micro sensor

### ■ Features

- Built-in miniature amplifier, NPN open collector output
- Various selection by installation position  
(Appearance: K, T, L Type)
- Light ON / Dark ON selectable
- High speed response frequency : 2kHz
- Wide range of power source: 5-24VDC  
(Easy to connect with various IC, Relay, Programmable Controller etc)
- Dust resistance structure: Protecting by window of Emitter/Receiver
- Red LED status indication

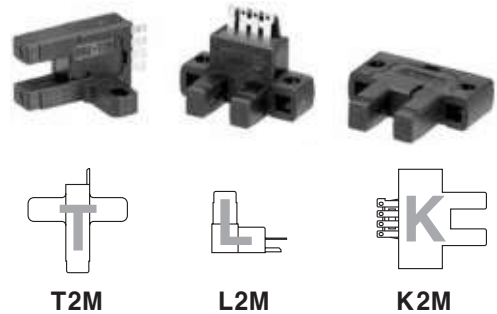

**⚠ Please read "Caution for your safety" in operation manual before using.**




### ■ Specifications

| Type                    | Photo micro sensor   |         |         |
|-------------------------|--|---------|---------|
| Model                   | BS5-K2M  | BS5-T2M | BS5-L2M |
| Sensing distance        | Fixed 5mm  |         |         |
| Sensing type            | Transmitted beam (Not modulated)   |         |         |
| Sensing target          | Opaque material of Min. 0.8×1.8mm  |         |         |
| Hysteresis              | 0.05mm   |         |         |
| Power supply            | 5-24VDC ±10% (Ripple P-P : Max. 10%)   |         |         |
| Current consumption     | Max. 30mA (at 26.4VDC )  |         |         |
| Control output          | NPN open collector output $\Rightarrow$ Load voltage : Max. 30VDC, Load current : Max. 100mA<br>Residual voltage : Max. 1.2V |         |         |
| Operation mode          | Light ON / Dark ON mode selectable by control wire   |         |         |
| Operation indicator     | Red LED  |         |         |
| Response time           | Received light : Max. 20 $\mu$ s, Interrupted light : Max. 100 $\mu$ s   |         |         |
| Response frequency      | 2kHz (Please see the measuring range of frequency response)  |         |         |
| Connection              | Connector type   |         |         |
| Light emitting element  | RED  |         |         |
| Light receiving element | Photo TR   |         |         |
| Vibration               | 1.5mm amplitude at frequency of 10 ~ 55Hz in each of X, Y, Z directions for 2 hours  |         |         |
| Shock                   | 500m/s <sup>2</sup> (50G) in X, Y, Z directions for 3 times  |         |         |
| Noise strength          | ±240V the square wave noise (pulse width: 1 $\mu$ s) by the noise simulator  |         |         |
| Dielectric strength     | 1,000VAC 50/60Hz for 1minute   |         |         |
| Insulation resistance   | Min. 20M $\Omega$ (at 250VDC mega)   |         |         |
| Ambient illumination    | Fluorescent lamp : Max. 1000lx   |         |         |
| Ambient temperature     | -20 ~ + 55 $^{\circ}$ C (at non-freezing status), Storage : -25 ~ + 85 $^{\circ}$ C  |         |         |
| Ambient humidity        | 35 ~ 85%RH (Storage : 35 ~ 85%RH)  |         |         |
| Protection              | IP50 (IEC standard)  |         |         |
| Material                | PA-6   |         |         |
| Approval                | <b>CE</b>  |         |         |
| Unit weight             | Approx. 30g  |         |         |

# Photo Micro Sensor


## Control output diagram

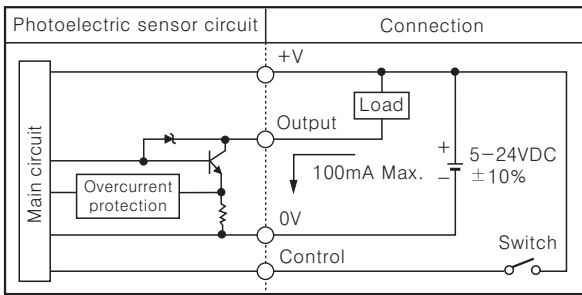


\*Switch OFF : Dark ON, Switch ON : Light ON

## How to measure response frequency

Response frequency value is from revolving of below circle panel.

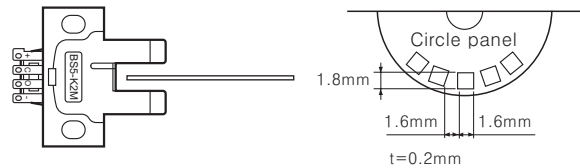


## Operation mode

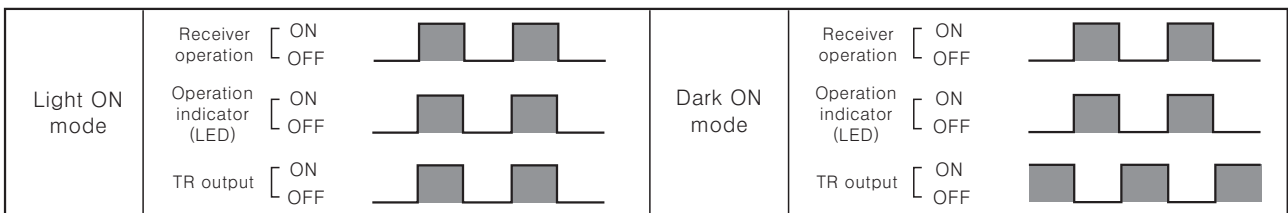

\*If the control output terminal is short-circuited or overcurrent condition is existed, the control output will turn off due to protection circuit.

## Connections

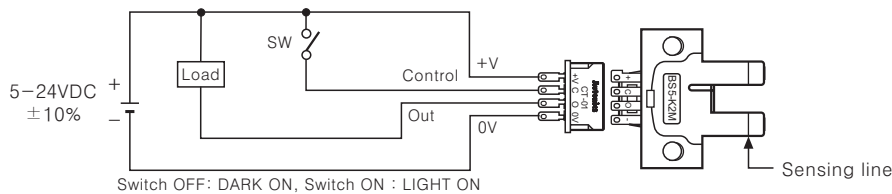


Switch OFF : DARK ON, Switch ON : LIGHT ON


\*Connect the unit by socket or, if it is soldered on terminal pin, it can be broken.

## Dimensions

### BS5-K2M

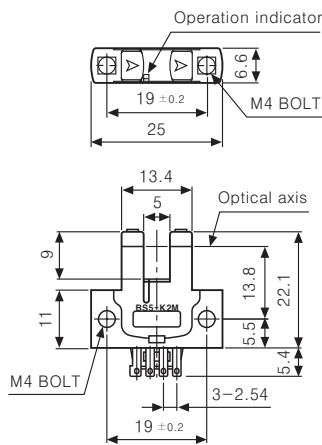


### BS5-T2M

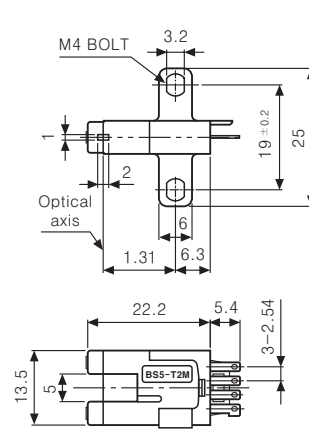


(Unit:mm)


### PCB mounting hole




### BS5-L2M

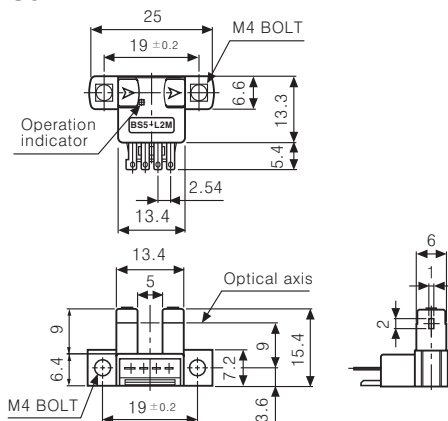

### Socket : CT-01 (Separately)

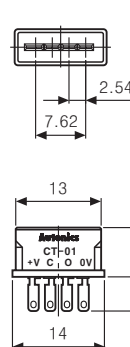

### Socket : CT-02 (Separately)

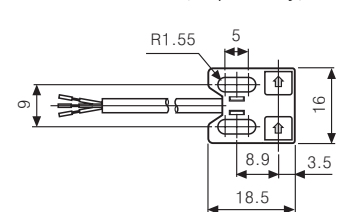

\*Cable : 4P,  $\phi$ 4, 1m  
\*Cable length is customizable.

- (A) Counter
- (B) Timer
- (C) Temp. controller
- (D) Power controller
- (E) Panel meter
- (F) Tacho/Speed/Pulse meter
- (G) Display unit
- (H) Sensor controller
- (I) Switching power supply
- (J) Proximity sensor
- (K) Photo electric sensor
- (L) Pressure sensor
- (M) Rotary encoder
- (N) Stepping motor & Driver & Controller
- (O) Graphic panel
- (P) Production stoppage models & replacement