

# W 11 × H 22 mm

## 16-segment Display Units



## D1AA Series

### PRODUCT MANUAL

**For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.**

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

#### Features

- Displays 61 types of characters and signs (0 to 9, A to Z, 24 symbols, decimal point)
- Selectable input logic (positive/negative), data input type (parallel/serial)
- 16-segment in red/green
- Wide range of input signal level (Low : 0 - 1.2 VDC $\approx$ , High : 4.5 - 24 VDC $\approx$ )
- 12 - 24 VDC $\approx$  power supply
- Multi-stage connection available

#### Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- $\triangle$  symbol indicates caution due to special circumstances in which hazards may occur.

**$\triangle$  Warning** Failure to follow instructions may result in serious injury or death.

- 01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss.** (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)  
Failure to follow this instruction may result in personal injury, economic loss or fire.
- 02. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact or salinity may be present.**  
Failure to follow this instruction may result in explosion or fire.
- 03. Install on a device panel to use.**  
Failure to follow this instruction may result in fire.
- 04. Do not connect, repair, or inspect the unit while connected to a power source.**  
Failure to follow this instruction may result in fire.
- 05. Check 'Unit description and function setting' before wiring.**  
Failure to follow this instruction may result in fire.
- 06. Do not disassemble or modify the unit.**  
Failure to follow this instruction may result in fire.

**$\triangle$  Caution** Failure to follow instructions may result in injury or product damage.

- 01. Use the unit within the rated specifications.**  
Failure to follow this instruction may result in fire or product damage.
- 02. Use a dry cloth to clean the unit, and do not use water or organic solvent.**  
Failure to follow this instruction may result in fire.
- 03. Keep the product away from metal chip, dust, and wire residue which flow into the unit.**  
Failure to follow this instruction may result in fire or product damage.

#### Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, it may cause unexpected accidents.
- 12 - 24 VDC $\approx$  model power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Install a power switch or circuit breaker in the easily accessible place for supplying or disconnecting the power.
- Keep away from high voltage lines or power lines to prevent inductive noise. In case installing power line and input signal line closely, use line filter or varistor at power line and shielded wire at input signal line.  
Do not use near the equipment which generates strong magnetic force or high frequency noise.
- This unit may be used in the following environments.
  - Indoors (in the environment condition rated in 'Specifications')
  - Altitude max. 2,000 m
  - Pollution degree 2
  - Installation category I

## Specifications

Model	D1AA-RN	D1AA-GN
Display method	16-segment LED (red)	16-segment LED (green)
Power supply	12 - 24 VDC≒	
Allowable voltage range	90 to 110 % of power supply	
Current consumption	≤ 32 mA	
Size	W 11 × H 22 mm	
Display character	61 characters and symbols (0 to 9, A to Z, 24 symbols, decimal point)	
Input	Parallel: Parallel 6 bits data, LATCH, decimal point Serial: Serial 6 / 7 bits data, CLOCK, LATCH, decimal point <sup>01)</sup>	
Input resistance	20 kΩ	
Input level	High: 4.5 - 24 VDC≒, Low: 0 - 1.2 VDC≒	
Max. Clock <sup>02)</sup>	≤ 3 kHz	
Output	Data output (serial input)	
Input logic	Positive logic (PNP), negative logic (NPN) selectable (by inner soldering)	
Noise immunity	± 300 V the square wave noise (pulse width: 1 μs) by the noise simulator	
Ambient temperature	0 to 60 °C, storage: -10 to 85 °C (no freezing or condensation)	
Ambient humidity	35 to 85 %RH (no freezing or condensation)	
Accessory	Connector (CT-10S)	
Approval	EUC	
Weight (packaged) <sup>03)</sup>	≈ 16 g (≈ 131 g)	

01) When applying the serial 6 bits input.

02) Max. Clock is for 1:1 of duty ratio (ON, OFF ratio).


03) The package weight is based on four.

## Sold Separately


- Caps: DAR (L)-R (1 set - left and right, D1SA-RN dedicated)
- Caps: DAR (L)-BL (1 set - left and right, D1SA-GN dedicated)

## Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics website.

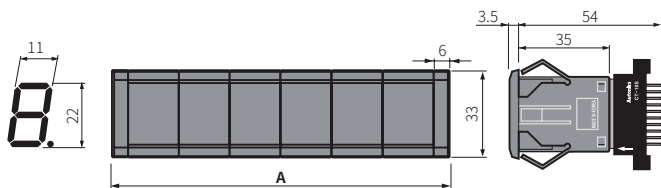


### Panel cut-out

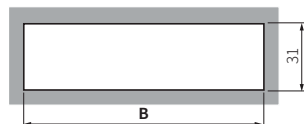


Digit (N)	Size A (20×N+12)	Size B (20×N+10)
1	32	30 ± 0.1
2	52	50 ± 0.1
3	72	70 ± 0.1
4	92	90 ± 0.1
5	112	110 ± 0.1
6	132	130 ± 0.1
7	152	150 ± 0.1
8	172	170 ± 0.1

### Connector (CT-10S)

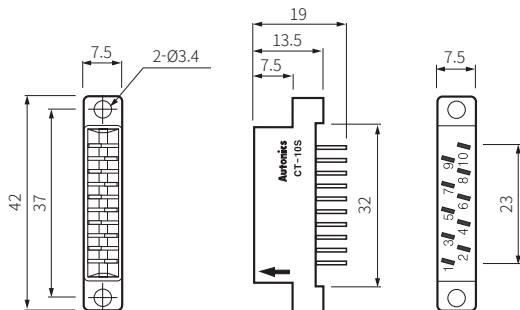

## Input Circuit

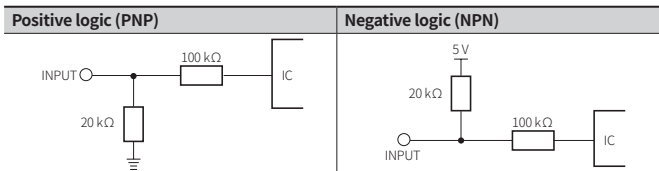


## Input Data Chart

- Blank: Though entering the data, it will not display.
- Based on the positive logic (PNP) input.

Upper 2 bits								Lower 4 bits			
D5	D4	D5	D4	D5	D4	D5	D4	D3	D2	D1	D0
L	L	L	H	H	L	H	H				
Blank		P		Blank		0		L	L	L	L
A		Q		Blank		1		L	L	L	H
B		R		"		2		L	L	H	L
C		S		⊗		3		L	L	H	H
D		T		⊙		4		L	H	L	L
E		U		⊘		5		L	H	L	H
F		V		Blank		6		L	H	H	L
G		W		'		7		L	H	H	H
H		X		;		8		H	L	L	L
I		Y		:		9		H	L	L	H
J		Z		*		⊃		H	L	H	L
K		[		+		⊆		H	L	H	H
L		\		⊆		⊂		H	H	L	L
M		]		-		⊇		H	H	L	H
N		⤴		⤵		⊃		H	H	H	L
O		⤵		⤴		⊇		H	H	H	H

## Unit Descriptions

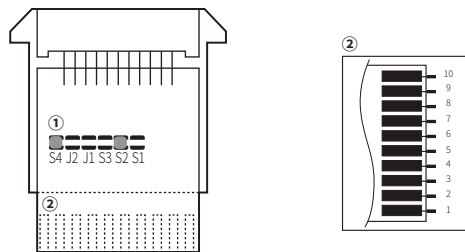

### ① Function set switches

- Open OFF / Short ON

No.	ON	OFF	Function	Default
S1	-	-	-	OFF
S2	Parallel	Serial	Input	ON
S3	7 bits	6 bits	Select serial input	OFF
J1	Use	Not used	Serial data output <sup>01)</sup>	OFF
J2	-	-	-	OFF <sup>02)</sup>
S4	Negative logic (NPN)	Positive logic (PNP)	Input logic	ON

01) Set as ON in serial input, as OFF in parallel input.

02) Do not change the soldering. (OFF fixed)

### ② I/O terminal


Terminal	Input		Serial input	
	Parallel input	Function	Code	Function
1	VCC	12 - 24 VDC≒	VCC	12 - 24 VDC≒
2	D0	Data input	N·C	-
3	D1		CK	Clock input
4	D2		DI	Data input
5	D3		DO	Data output
6	D4		N·C	-
7	D5	N·C	-	
8	LE	LATCH input	LE	LATCH input
9	DP	Decimal point input	DP	Decimal point input
10	GND	0 V	GND	0 V

## Multi-stage Connection


- Based on 4-digit, connection of rear part of the product.

### Parallel input


- Static Parallel

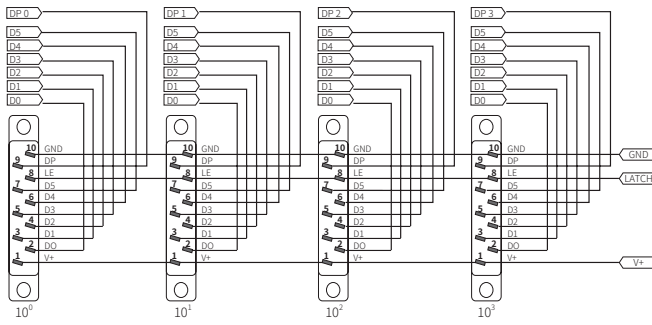

- Dynamic Parallel

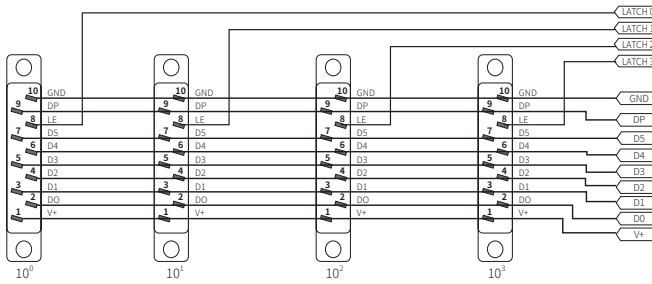


### Serial input

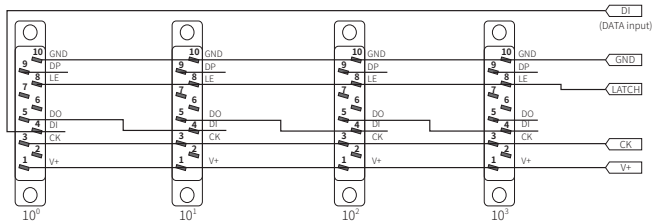


## Block Diagram

### Parallel input


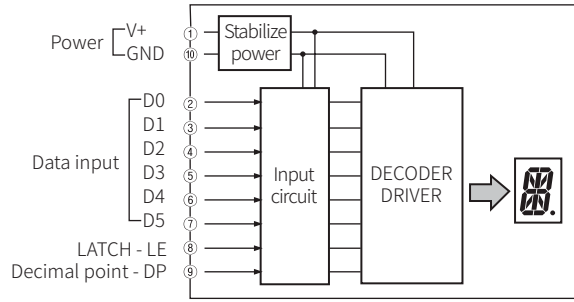


### Serial input

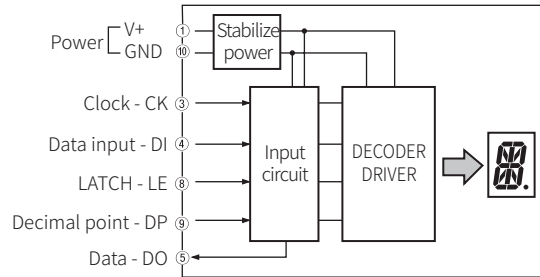

## Sold Separately: Caps (DAR(L)-□)

- Unit: mm, For the detailed drawings, follow the Autonics website.



- D1SA-RN: DAR(L)-R (left-right)
- D1SA-GN: DAR(L)-BL (left-right)
- Caps are sold as a one set (left-right).

## Example Programs

Download the various example programs from the Autonics website.